


Box dimensions : 500 / 500 / 45 mm

Economy Option

Layout of LED modules

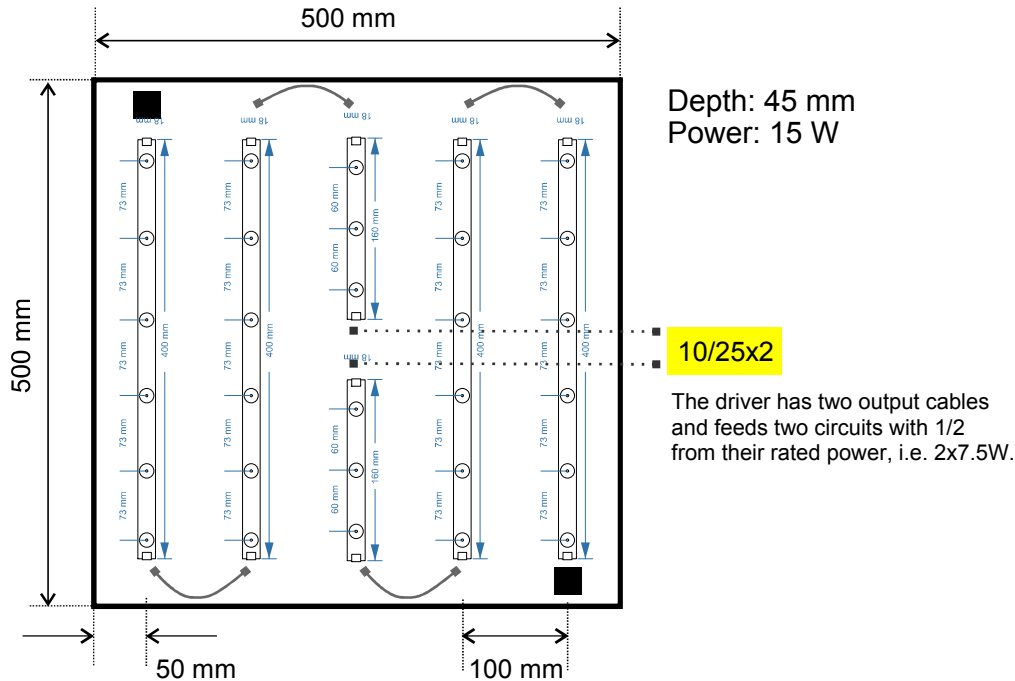






Depth: 45 mm
Power: 15 W

10/25x2

The driver has two output cables
and feeds two circuits with 1/2
from their rated power, i.e. 2x7.5W.


Quantity specification

-  LED MODULE D1000/LM400 (6W) – 4 pcs
-  LED MODULE D1000/LM160(3W) – 2 pcs
-  CABLE D1000/150 mm – 4 pcs
-  DRIVER D1000/10-25Wx2 /two output cables/ – 1pc
-  PLUG D1000/2PIN – 2 pcs

Technical specification

LED MODULE D1000/LM400	type of diode	SMD2835	LED MODULE D1000/LM160	type of diode
	dimensions	400 x 18mm		dimensions
	power	6W		power
	color temperature	5700 - 6000K		color temperature
	beam angle	160°		beam angle
	emitted light	135 lm/W		emitted light
	IP class	24		IP class
	light decay	<5%/Year		light decay
	operating current	220 - 240mA		operating current

DRIVER D1000 / 10-25x2
(with two output cables)



dimensions **40/27/22mm**
power **10-25W**
input **AC 165-265V 50/60Hz**
output **DC 30-90V 240mA**
IP class **24**

CONNECTING CABLE 150MM D1000 / C150



length **150mm**

END CAP D1000 / 2 PINS



2 Pin